


- IT** Gru a torre modulare - Versione City Crane
- UK** Modular tower crane - City Crane Version
- DE** Modulare Turmdrehkran - City Crane Ausführung
- ES** Grúa a montaje modular - Versión City Crane
- FR** Grue a tour modulaire - Version City Crane

SMT 400

Triverter 444

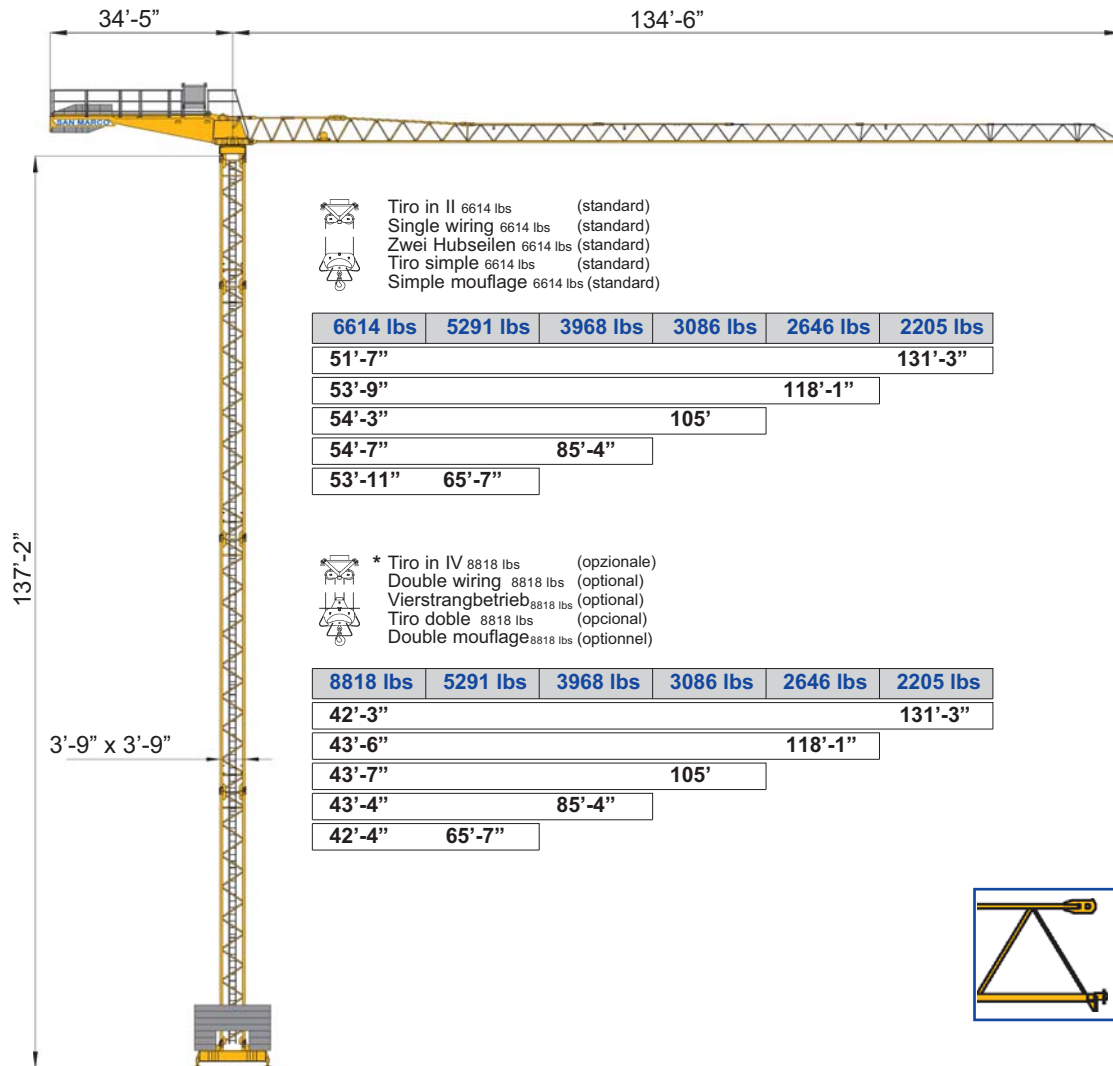


Tiro in II 6614 lbs (standard)
 Single wiring 6614 lbs (standard)
 Zwei Hubseilen 6614 lbs (standard)
 Tiro simple 6614 lbs (standard)
 Simple mouflage 6614 lbs (standard)

6614 lbs	5291 lbs	3968 lbs	3086 lbs	2646 lbs	2205 lbs
51'-7"					131'-3"
53'-9"				118'-1"	
54'-3"			105'		
54'-7"		85'-4"			
53'-11"		65'-7"			

* Tiro in IV 8818 lbs (opzionale)
 Double wiring 8818 lbs (optional)
 Vierstrangbetrieb 8818 lbs (optional)
 Tiro doble 8818 lbs (opcional)
 Double mouflage 8818 lbs (optionnel)

8818 lbs	5291 lbs	3968 lbs	3086 lbs	2646 lbs	2205 lbs
42'-3"					131'-3"
43'-6"				118'-1"	
43'-7"			105'		
43'-4"		85'-4"			
42'-4"		65'-7"			



- IT** Diagrammi di carico
- UK** Loads diagrams
- DE** Lastkurven
- ES** Curvas de carga
- FR** Courbes de charges

ft	39'4"	45'11"	52'6"	59'1"	65'7"	72'2"	78'9"	85'4"	91'10"	98'5"	105'	111'7"	118'1"	124'9"	131'3"	ft
	6614	6614	6482	5666	5027	4497	4057	3704	3395	3131	2888	2690	2491	2337	2205	131'-3"
	6614	6614	6614	5930	5269	4718	4255	3880	3571	3285	3042	2822	2646	118'1"		
lbs	6614	6614	6614	5997	5313	4762	4321	3924	3594	3329	3086	105'				
	6614	6614	6614	6041	5357	4806	4343	3968	85'4"							
	6614	6614	6614	5952	5291	65'7"										

Tiro in II 6614 lbs
 Single wiring 6614 lbs
 Zwei Hubseilen 6614 lbs
 Tiro simple 6614 lbs
 Simple mouflage 6614 lbs

ft	39'4"	45'11"	52'6"	59'1"	65'7"	72'2"	78'9"	85'4"	91'10"	98'5"	105'	111'7"	118'1"	124'9"	131'3"	ft
	8818	7981	6834	5952	5269	4696	4233	3836	3483	3197	2954	2734	2535	2359	2205	131'-3"
	8818	8267	7077	6173	5445	4872	4387	3968	3638	3329	3064	2844	2646	118'1"		
lbs	8818	8289	7099	6195	5467	4872	4387	3990	3638	3329	3086	105'				
	8818	8245	7055	6151	5423	4850	4365	3968	85'4"							
	8818	8025	6856	5975	5291	65'7"										

Tiro in IV 8818 lbs
 Double wiring 8818 lbs
 Vierstrangbetrieb 8818 lbs
 Tiro doble 8818 lbs
 Double mouflage 8818 lbs

* A richiesta
On request
Auf Wunsch
Sobre demanda
Sur demande



DIN 15018 H1 B3
ISO 4301



